




W5747 Lost Arrow Road • Fond du Lac, WI 54937 • Ph(920)922-9168 • F(920)922-1429  
www.tecre.com

## Instructions for the Model 4560 and Model 6656 Circle Cutter

1. Tip the cutting wheel carriage up to allow a button graphic to be loaded as seen in picture A.
2. Lift the semi-clear mylar template and position the graphic under it. The portion of the graphic as seen through the opening in the template is what will be cut out.
3. Once the graphic is in the desired position, lower the cutting wheel carriage down with the operating handle in the 11 o'clock position as shown in picture B.
4. Place the heel of your left hand on the carriage extension with your fingers under the cutting table. While pressing down firmly with your left hand rotate the operating handle slightly more than one-half turn with your right hand to completely cut the button graphic out. Multiple images can be cut at once if the graphics are registered correctly (one positioned perfect above the other).

A.

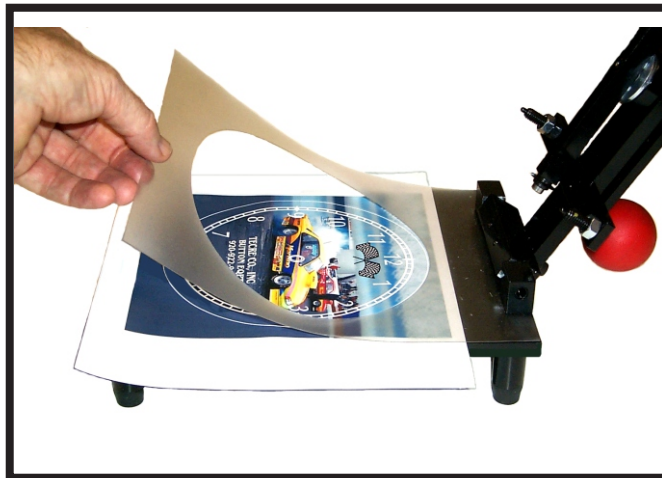

B.

