




W5747 Lost Arrow Road • Fond du Lac, WI 54937 • Ph(920)922-9168 • F(920)922-1429  
www.tecre.com

## 2-1/4", 1-1/2", or 1-3/4" Key Chain Button Making Supplies: How to Make a Key Chain Button

1. Identify the crimp die and the pickup die of the button maker machine.
2. Rotate the die table so that the crimp die is positioned under the upper die.
3. Insert a shell into the pickup die. Place the graphic on the shell. Place the mylar on top of the graphic.
4. Rotate the die table one-half turn clockwise until the die table stop is against the outer column.
5. Pull the handle down as far as it will go and raise it back up to its rest position.
6. Place a flat key chain back into the crimp die with the sharp side up.
7. Rotate the die table one-half turn counterclockwise until the die table stop is against the the outer column of the button maker machine.
8. Pull the handle down as far as it will go and raise it back up to its rest position.
9. Rotate the die table and remove the button.
10. Snap in one of the three key chain options into the open slot on the side of the flat back to finish the key chain.

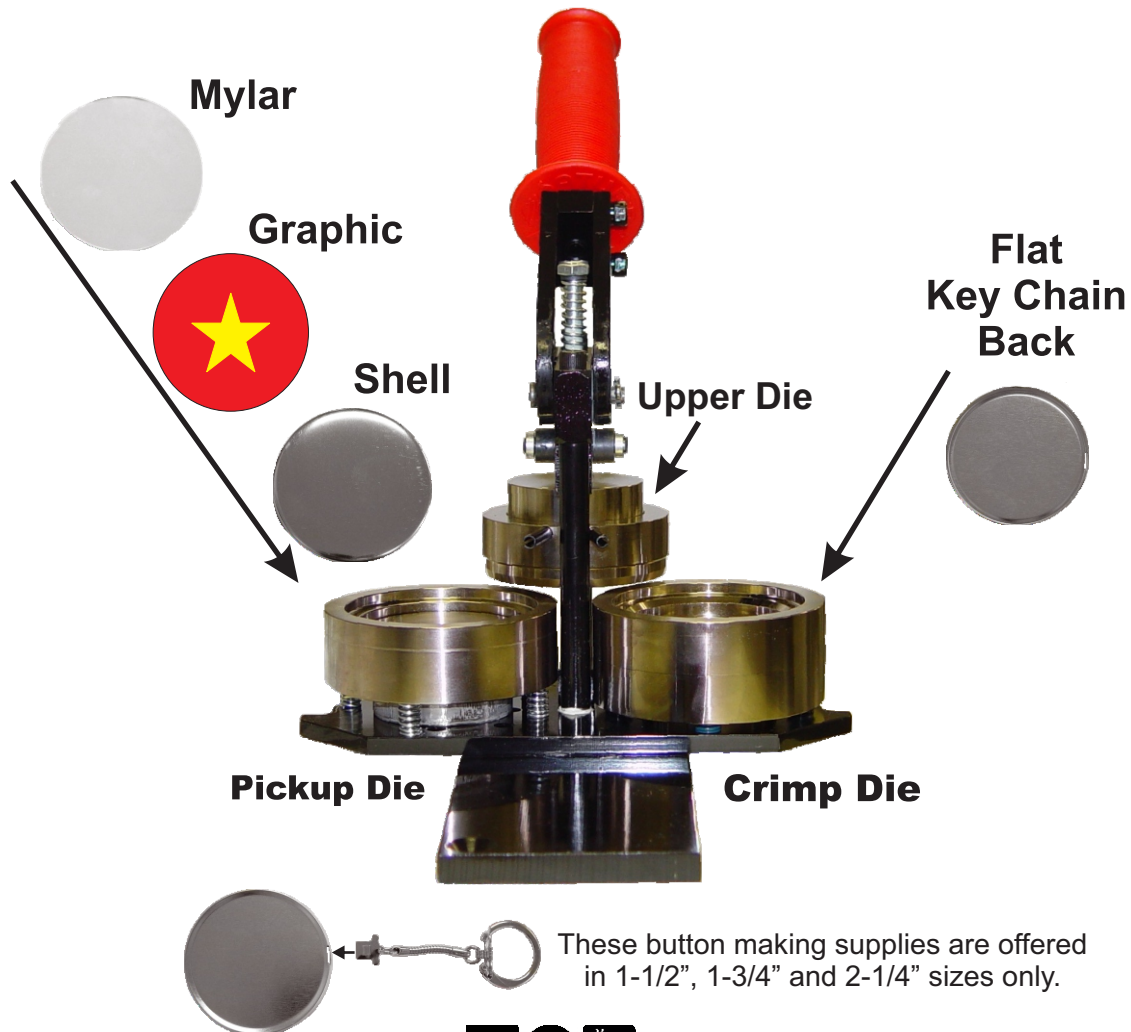

These button making supplies are offered in 1-1/2", 1-3/4" and 2-1/4" sizes only.

